
### LINESPOT II LOWBAY EMERGENCY LIGHT Y9953WA





|--|

# Self-contained LED Emergency Light with 3 h Battery and Wireless Central Monitoring (Invidually packed TWT9953WA)

The Linespot II Lowbay is a surface-mounted emergency light that is particularly suitable for low spaces. The luminaire's optics are designed to provide a long and narrow light pattern that illuminates corridors and escape routes efficiently.

Thanks to the IP44 enclosure class, the Linespot II is also suitable for damp areas. The luminaire is easy and fast to install, thanks to a separate mounting base, which is also connected to the power supply.

We reserve the rights to make modifications without notice. Copyright © 2024 Teknoware. All rights reserved. Date: May 12, 2024 | Source: www.teknoware.com/en/emergency-lighting-1/linespot-ii-lowbay-emergency-light-y9953wa



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com


Product Code	Y9953WA
Feature	Aalto Control, Lumi Test
Mounting (standard)	surface
Mounting (optional)	pendel
Customs Code	94056080
GTIN Code	6438045016900
ETIM Product Class	EC001957
Length	185 mm
Width	185 mm
Height	52 mm
Weight	1kg
Backup	3 h
Max Input Power VA	6 VA
Nominal Supply Voltage	220-240 V, 50/60 Hz AC
Protection Class	Ш
IP Class	IP44
Temperature Range Min - Max	0+35 °C
Glow Wire Test of Plastic Materials	850 °C
Light Source	LED
Body Material	plastic
Colour	RAL9003
Electrical Installation	2/3 x 2,5 mm²
Luminous Flux	230 lm

### Emergency lighting for escape routes (ceiling mounting)

Table of 1 lux for escape routes in the middle line according to the norm EN 1838. Level of measurement 0,02 m, measurement result with battery operation.

We reserve the rights to make modifications without notice. Copyright © 2024 Teknoware. All rights reserved. Date: May 12, 2024 | Source: www.teknoware.com/en/emergency-lighting-1/linespot-ii-lowbay-emergency-light-y9953wa



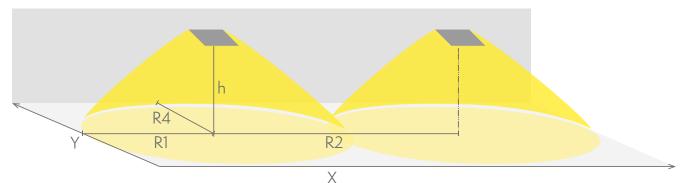

R1 distance from wall (X axis) R2 installation distance between lights (X axis) R4 distance from wall (Y axis) Y9953WA

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R4 (m)
		1 lux	1 lux	1 lux
2,5	7,5	9	21	1
4	3	10	28	1
6	1,5	9	22	1

#### OPTIONAL ACCESSORIES:

# SHOCK PROTECTING COVERS FOR EMERGENCY LIGHTS

T	-		1.1		
			-		
F		-	- 7-	-	+
		<u> </u>			

Product Code	Product Name	Compatible Product Groups
TW77507B	Shock protecting cover TW77507B	ESC 10 Emergency Exit Lights, ESC 80 Emergency Exit Lights

#### OPTIONAL MOUNTING ACCESSORIES FOR EMERGENCY LIGHTS


Product Code	Product Name	Compatible Product Groups
TW77504F	Suspension bracket TW77504F	Linespot II: Lowbay, Surface-Mounted Emergency Lights, Zonespot II: Lowbay, Surface-Mounted Emergency Lights, Zonespot II: Midbay, Surface-Mounted Emergency Lights, Linespot II: Midbay, Surface-Mounted Emergency Lights, Zonespot II: Highbay, Surface-Mounted Emergency Lights

We reserve the rights to make modifications without notice. Copyright © 2024 Teknoware. All rights reserved. Date: May 12, 2024 | Source: www.teknoware.com/en/emergency-lighting-1/linespot-ii-lowbay-emergency-light-y9953wa



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland Tel +358 3 883 020 | VAT-number F101494751 | teknoware.com | emexit@teknoware.com



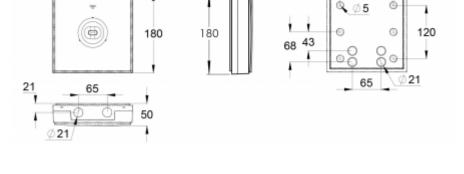

We reserve the rights to make modifications without notice. Copyright © 2024 Teknoware. All rights reserved. Date: May 12, 2024 | Source: www.teknoware.com/en/emergency-lighting-1/linespot-ii-lowbay-emergency-light-y9953wa



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com