## SLIMSPOT II LINE MIDBAY EMERGENCY LIGHT TWT1151WKP



























## Addressable 230 V centrally supplied emergency light

Slimspot II is a recessed emergency light that is effective and seamless. It has an elegant and minimalist appearance, so it blends in with the surroundings and architecture. The broad Slimspot II product family and range of optics offers many options to suit a variety of applications and systems. Slimspot II is designed for indoor lighting, and it has durable metal framing. The standard colour of the luminaire is white. On request, it is also possible to order Slimspot II in black and grey to match the surrounding environment.

The Slimspot II Line Midbay provides a long and narrow pattern that illuminates escape routes efficiently.

This model is equipped with local phase monitoring. The luminaire turns on when the central

We reserve the rights to make modifications without notice.

Copyright © 2024 Teknoware. All rights reserved.

Date: May 20, 2024 | Source:

www.teknoware.com/en/emergency-lighting-1/slimspot-ii-line-midbay-emergency-light-twt11



battery unit switches to emergency use and when the luminaire's own phase monitoring input loses power. This model is very well suited for hotel rooms, for example.




Product Code	TWT1151WKP		
Feature	Intelligent Controller, Tapsa Control		
Mounting (standard)	recess		
Customs Code	94056080		
GTIN Code	6438045024325		
ETIM Product Class	EC001957		
Length	90 mm		
Width	90 mm		
Height	47 mm		
Weight	0,4 kg		
Max Input Power VA	10 VA		
Max Input Power W	5,5 W		
Nominal Supply Voltage	220-240 V, 50/60 Hz AC, DC		
Protection Class	1		
IP Class	IP20		
Temperature Range Min - Max	-30+50 °C		
Glow Wire Test of Plastic Materials	650 °C		
Light Source	LED		
Body Material	metal		
Aperture for Recess Mounting	ø75 mm		
Colour	RAL9003		
Electrical Installation	3 x 2,5 mm <sup>2</sup>		
Luminous Flux	265 lm		

## Emergency lighting for escape routes (ceiling mounting)

Table of 1 lux for escape routes in the middle line according to the norm EN 1838.

Level of measurement 0,02 m, measurement result with battery operation.




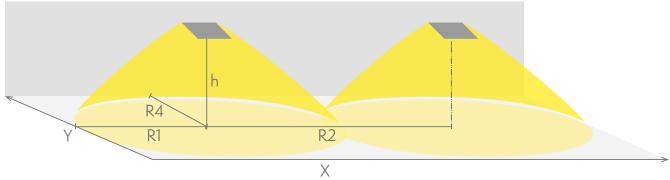

R1 distance from wall (X axis)
R2 installation distance between lights (X axis)
R4 distance from wall (Y axis)
TWT1151WKP

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R4 (m)
		1 lux	1 lux	1 lux
2,5	40	5	11	1
4	15	6,5	17	1
6	6	7,5	20	1
8	3,5	7	21	1
10	2	6,5	21	1



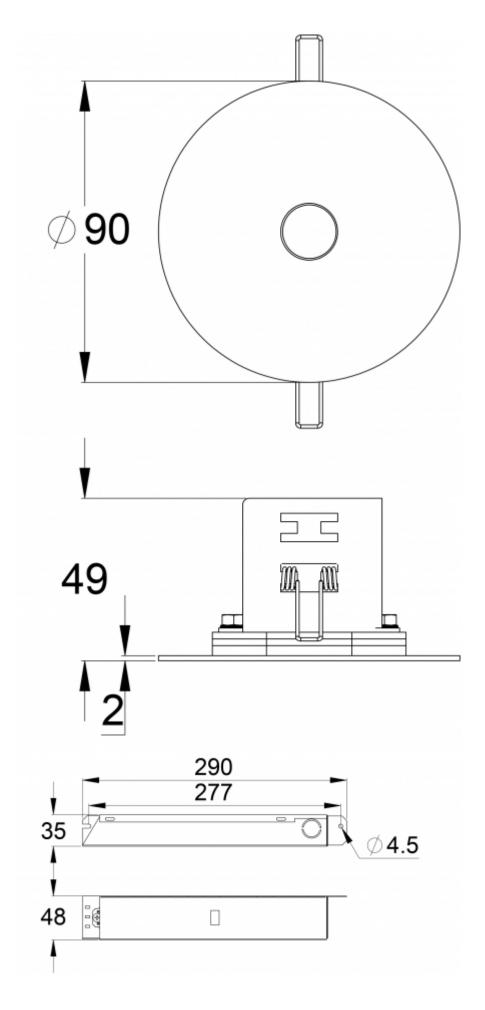

We reserve the rights to make modifications without notice.

Copyright © 2024 Teknoware. All rights reserved.

Date: May 20, 2024 | Source:

www.teknoware.com/en/emergency-lighting-1/slimspot-ii-line-midbay-emergency-light-twt11

51wkp

