


ESC 90 EMERGENCY EXIT LIGHT Y9071W120



24-230 V centrally supplied emergency exit light with a set of pictograms, 25 m viewing distance (Individually packed TWT9071W)

The ESC 90 is an emergency exit light that combines cutting-edge technology with modern lighting design. Thanks to high quality electronics, optics and mechanical design, the luminaire has uniformly illuminated pictograms and low power consumption.

Changing the pictograms is easy and the plastic sheet slides easily into place. The ESC 90 exit light is easy to install on the ceiling or on a wall. It can be used 1 or 2 sided, with either recess or surface mounting. The ESC 90 is particularly easy and fast to install thanks to the separate mounting piece, which the power supply is also connected to.

We reserve the rights to make modifications without notice.
Copyright © 2024 Teknoware. All rights reserved.
Date: May 08, 2024 | Source:
www.teknoware.com/en/emergency-lighting/esc-90-emergency-exit-light-y9071w120


Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland
Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com

 **TEKNOWARE®**

Product Code	Y9071W120
Mounting (standard)	ceiling, wall
Mounting (optional)	recess, flag, pendel
Customs Code	94056080
GTIN Code	6438045020570
ETIM Product Class	EC001957
Length	273 mm
Width	205 mm
Height	46 mm
Weight	0,44 kg
Max Input Power VA	2 VA (24 V), 5,5 VA (230 V)
Max Input Power W	1,5 W (24 V), 2 W (230 V)
Nominal Supply Voltage	24-230 V, 50/60 Hz AC, DC
Protection Class	III(24V),II(230V)
IP Class	IP44
Temperature Range Min - Max	-30...+50 °C
Glow Wire Test of Plastic Materials	650 °C
Viewing Distance	25 m
Light Source	LED
Body Material	plastic
Colour	RAL9003
Electrical Installation	2 x 2,5 mm ² (24 V), 3 x 2,5 mm ² (230 V)

Downlight chart for Exit Lights

Tables of 1 lux and 0,5 lux, under the Exit Light.
Level of measurement 0,02 m, measurement result with battery operation.

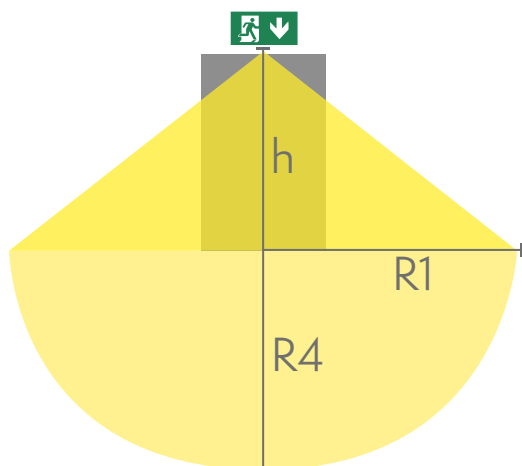

R1 distance from wall (X axis)
R4 distance from wall (Y axis)

Y9071W120

Mounting height (m)	Below the light lux	R1 (m)	R4 (m)	R1 (m)	R4 (m)
		1 lux	1 lux	0,5 lux	0,5 lux
2	1.5	0.5	0.5	1	1
2,5	1.1	0.5	0.5	1	1

We reserve the rights to make modifications without notice.

Copyright © 2024 Teknoware. All rights reserved.


Date: May 08, 2024 | Source:

www.teknoware.com/en/emergency-lighting/esc-90-emergency-exit-light-y9071w120

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com



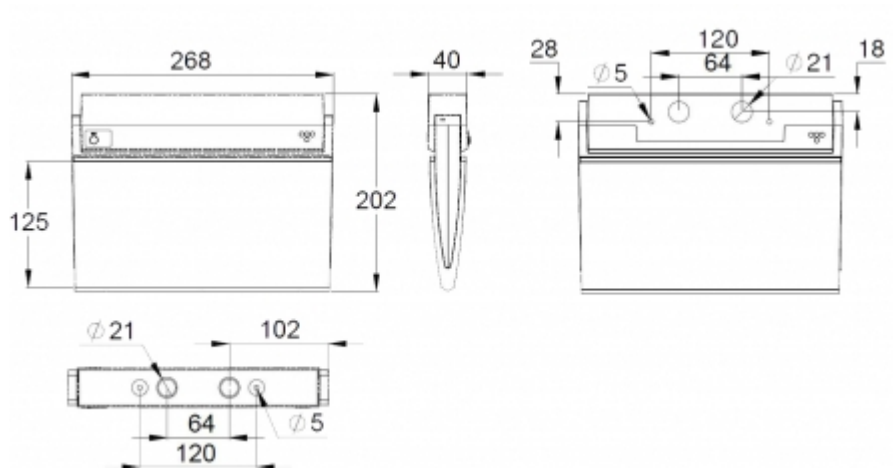

We reserve the rights to make modifications without notice.

Copyright © 2024 Teknoware. All rights reserved.

Date: May 08, 2024 | Source:

www.teknoware.com/en/emergency-lighting/esc-90-emergency-exit-light-y9071w120

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com

