


CHARGER W010005

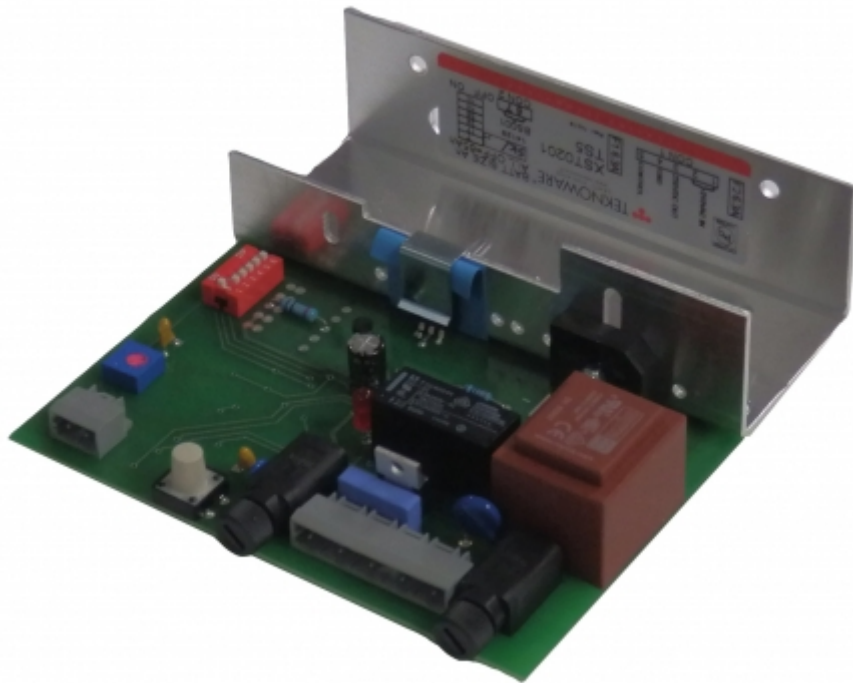

Charger for TKT6x Central Battery Systems (XST0201)

We reserve the rights to make modifications without notice.
Copyright © 2024 Teknoware. All rights reserved.
Date: May 04, 2024 | Source:
www.teknoware.com/en/emergency-lighting/charger-w010005

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland
Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com



Product Code	W010005
GTIN Code	6438045013114
ETIM Product Class	EC002839
Length	135 mm
Width	130 mm
Height	37 mm
Weight	0,26 kg

COMPATIBLE PRODUCTS:

NON-ADDRESSABLE 230 V CENTRAL BATTERY SYSTEMS



Product Code	Nominal Supply Voltage	Number of Output Circuits	Max Load of Circuits (VA)
TKT6506B	1~ N/PE 220-240 VAC, 50 Hz	6 x 250 VA / W	
TKT6506BP	1~ N/PE 220-240 VAC, 50 Hz	6 x 250 VA / W	
TKT6512BP	1~ N/PE 220-240 VAC, 50 Hz	12 x 250 VA / W	
TKT6512B	1~ N/PE 220-240 VAC, 50 Hz	12 x 250 VA / W	
TKT6518BP	1~ N/PE 220-240 VAC, 50 Hz	18 x 250 VA / W	
TKT6518B	1~ N/PE 220-240 VAC, 50 Hz	18 x 250 VA / W	
TKT6524BP	1~ N/PE 220-240 VAC, 50 Hz	24 x 250 VA / W	
TKT6524B	1~ N/PE 220-240 VAC, 50 Hz	24 x 250 VA / W	
TKT6506BF	3~ N/PE 220-240/380-415 VAC, 50/60 Hz	6 x 250 VA / W	
TKT6512BF	3~ N/PE 220-240/380-415 VAC, 50/60 Hz	12 x 250 VA / W	
TKT6518BF	3~ N/PE 220-240/380-415 VAC, 50/60 Hz	18 x 250 VA / W	
TKT6524BF	3~ N/PE 220-240/380-415 VAC, 50/60 Hz	24 x 250 VA / W	

ADDRESSABLE 230 V CENTRAL BATTERY SYSTEMS



We reserve the rights to make modifications without notice.
 Copyright © 2024 Teknoware. All rights reserved.
 Date: May 04, 2024 | Source:
www.teknoware.com/en/emergency-lighting/charger-w010005

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland
 Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com



Product Code	Nominal Supply Voltage	Number of Output Circuits	Max Load of Circuits (VA)
TKT6716C	3~ N/PE 220-240/380-415 VAC, 50/60 Hz	16 x 350 VA / W	
TKT6724C	3~ N/PE 220-240/380-415 VAC, 50/60 Hz	24 x 350 VA / W	
TKT6732C	3~ N/PE 220-240/380-415 VAC, 50/60 Hz	32 x 350 VA / W	
TKT6740C	3~ N/PE 220-240/380-415 VAC, 50/60 Hz	40 x 350 VA / W	
TKT6748C	3~ N/PE 220-240/380-415 VAC, 50/60 Hz	48 x 350 VA / W	
TKT6756C	3~ N/PE 220-240/380-415 VAC, 50/60 Hz	56 x 350 VA / W	
TKT6808C	1~ N/PE 220-240 VAC, 50/60 Hz	8 x 350 VA / W	
TKT6816C	1~ N/PE 220-240 VAC, 50/60 Hz	16 x 350 VA / W	
TKT6824C	1~ N/PE 220-240 VAC, 50/60 Hz	24 x 350 VA / W	
TKT6608C	1~ N/PE 220-240 VAC, 50/60 Hz	8 x 350 VA / W	
TKT6616C	1~ N/PE 220-240 VAC, 50/60 Hz	16 x 350 VA / W	
TKT6624C	1~ N/PE 220-240 VAC, 50/60 Hz	24 x 350 VA / W	
TKT6508C	1~ N/PE 220-240 VAC, 50 Hz	8 x 250 VA / W	
TKT6516C	1~ N/PE 220-240 VAC, 50 Hz	16 x 250 VA / W	
TKT6524C	1~ N/PE 220-240 VAC, 50 Hz	24 x 250 VA / W	

We reserve the rights to make modifications without notice.
Copyright © 2024 Teknoware. All rights reserved.
Date: May 04, 2024 | Source:
www.teknoware.com/en/emergency-lighting/charger-w010005

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland
Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com

