


SAFE 6 LED EMERGENCY LIGHT Y0652WA



Self-contained 1 h Battery, Aalto Control compatible, LED emergency light (Individually packed TWT0652WA)

SAFE 6 is Teknoware's LED emergency light for areas with 2,5-10 meters high ceilings. The plastic bodied emergency light can be ceiling, wall and flag mounted.

SAFE 6 is splash proof, so the luminaires are suitable for damp locations, for example for parking hall and outdoor roofed shelters.

SAFE 6 emergency light is suitable for open areas. It also works as emergency light for escape routes with a separate lens set.

Product Code	Y0652WA
Feature	Aalto Control, Lumi Test
Mounting (standard)	ceiling, wall, flag
Mounting (optional)	pendel, recess
Customs Code	94056080
GTIN Code	6438045017686
ETIM Product Class	EC001957
Length	267 mm
Width	153 mm
Height	70 mm
Weight	1,0 kg
Backup	1 h
Max Input Power VA	3,3 VA
Nominal Supply Voltage	220-240 V, 50/60 Hz AC
Protection Class	I
IP Class	IP44
Temperature Range Min - Max	-10...+30 °C
Glow Wire Test of Plastic Materials	850 °C
Light Source	LED
Body Material	plastic
Aperture for Recess Mounting	270 x 60 mm
Colour	RAL9003
Electrical Installation	3 x 2,5 mm ²
Luminous Flux	125 lm

Emergency lighting for open areas (ceiling mounting)

Table of 0,5 lux for open areas according to the norm EN 1838, 0,5 m edge district is considered in the table.

Level of measurement 0,02 m, measurement result with battery operation.

We reserve the rights to make modifications without notice.

Copyright © 2024 Teknoware. All rights reserved.

Date: May 03, 2024 | Source:

www.teknoware.com/en/emergency-lighting/safe-6-led-emergency-light-y0652wa



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com



R1 distance from wall (X axis)

R2 installation distance between lights (X axis)

R3 installation distance between lights (Y axis)

R4 distance from wall (Y axis)

Y0652WA

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R3 (m)	R4 (m)
		0,5 lux	0,5 lux	0,5 lux	0,5 lux
2,5	5,8	3	5	5	3
4	2,2	3,5	6	6	3,5

OPTIONAL ACCESSORIES:

SHOCK PROTECTING COVERS FOR EMERGENCY LIGHTS



Product Code	Product Name	Compatible Product Groups
TW77508B	Shock protecting cover TW77508B	ESC 0,5 Emergency Exit Lights, ESC 4 Emergency Exit Lights, ESC 90 Emergency Exit Lights, Safe 82 Emergency Lights

OPTIONAL MOUNTING ACCESSORIES FOR EMERGENCY LIGHTS

Product Code	Product Name	Compatible Product Groups
TW77504C	Suspension bracket TW77504C	ESC 4 Emergency Exit Lights, Safe 6 Emergency Lights
TW77504D	Suspension bracket TW77504D	ESC 4 Emergency Exit Lights, Safe 6 Emergency Lights
TWT6001B	Recess mounting frame TWT6001B	Safe 6 Emergency Lights, ESC 6

We reserve the rights to make modifications without notice.

Copyright © 2024 Teknoware. All rights reserved.

Date: May 03, 2024 | Source:

www.teknoware.com/en/emergency-lighting/safe-6-led-emergency-light-y0652wa

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com



OTHER ACCESSORIES FOR EMERGENCY LIGHTS





Product Code	Product Name	Compatible Product Groups
XWT0655	Lens set XWT0655	Safe 6 Emergency Lights

We reserve the rights to make modifications without notice.
Copyright © 2024 Teknoware. All rights reserved.
Date: May 03, 2024 | Source:
www.teknoware.com/en/emergency-lighting/safe-6-led-emergency-light-y0652wa

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland
Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com



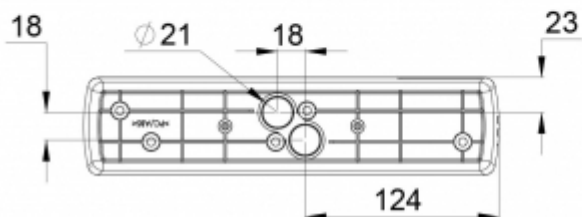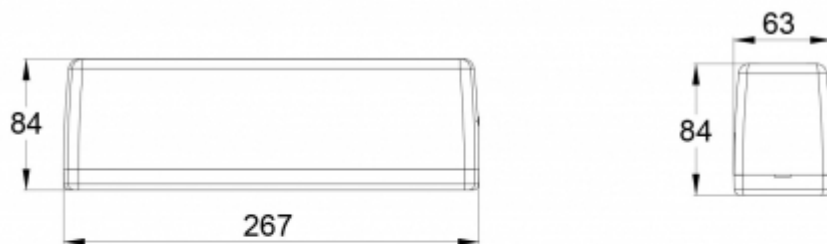

We reserve the rights to make modifications without notice.
 Copyright © 2024 Teknoware. All rights reserved.
 Date: May 03, 2024 | Source:
www.teknoware.com/en/emergency-lighting/safe-6-led-emergency-light-y0652wa

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland
 Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com

