


SAFE 6 EMERGENCY LIGHTS

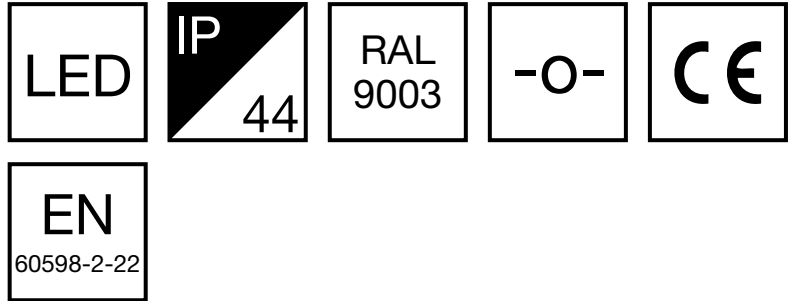

SAFE 6 is Teknoware's LED emergency light for areas with 2,5-10 meters high ceilings. The plastic bodied emergency light can be ceiling, wall and flag mounted.

SAFE 6 is splash proof, so the luminaires are suitable for damp locations, for example for parking hall and outdoor roofed shelters.

SAFE 6 emergency light is suitable for open areas. It also works as emergency light for escape routes with a separate lens set.

The product codes starting with letter Y include an individually packed luminaire. The product codes starting with TW include the luminaire only.

SELF-CONTAINED EMERGENCY LIGHTS WITH BATTERY AND SELF-TESTING

Product Code	Nominal Supply Voltage	Feature	Backup (h)
TWT0652WM	220-240 V, 50/60 Hz AC	Lumi Test	1
Y0652WM	220-240 V, 50/60 Hz AC	Lumi Test	1

SELF-CONTAINED EMERGENCY LIGHTS WITH BATTERY AND WIRELESS CENTRAL MONITORING

[Contact Us](#) | [Legal Notice](#)
[Supplier Portal Login](#)

Teknoware Oy | P.O. Box 19,
 15101 Lahti | Ilmarisentie 8,
 15200 Lahti Finland
 Tel +358 3 883 020 | Fax +358
 3 883 0240 | VAT-number
 FI01494751

Product Code	Nominal Supply Voltage	Feature	Backup (h)
TWT0652WA	220-240 V, 50/60 Hz AC	Aalto Control, Lumi Test	1
Y0652WA	220-240 V, 50/60 Hz AC	Aalto Control, Lumi Test	1

ADDRESSABLE 230 V CENTRALLY SUPPLIED EMERGENCY LIGHTS

Product Code	Nominal Supply Voltage	Feature
TWT0651WK	220-240 V, 50/60 Hz AC, DC	Intelligent Controller, Tapsa Control
Y0651WK	220-240 V, 50/60 Hz AC, DC	Intelligent Controller, Tapsa Control

NON-ADDRESSABLE 230 V CENTRALLY SUPPLIED EMERGENCY LIGHTS

Product Code	Nominal Supply Voltage	Feature
TWT0671W	24-230 V, 50/60 Hz AC, DC	
Y0671W	24-230 V, 50/60 Hz AC, DC	

[Contact Us](#) | [Legal Notice](#) |
[Supplier Portal Login](#)

Teknoware Oy | P.O. Box 19,
15101 Lahti | Ilmarisentie 8,
15200 Lahti Finland

Tel +358 3 883 020 | Fax +358
3 883 0240 | VAT-number
FI01494751