


PLUS EMERGENCY EXIT LIGHT TWSF192WA

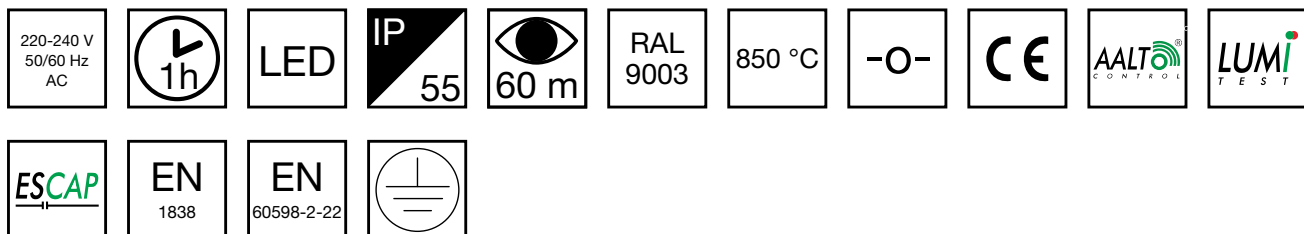

Self-contained emergency exit light with 1 h super capacitor and wireless central monitoring

Teknoware Plus is a durable emergency exit light for large spaces. The exit light with a metal body is particularly well suited for demanding conditions, such as parking and industrial halls, where the exit sign must be visible at distances of up to 60 metres. The product is dust- and waterproof (IP55) and durable against hard mechanic wear.

Plus can be used as one or two-sided, and the pictograms are easy to replace. Plus can be mounted to ceiling as standard, but it can be wall mounted with a separate bracket. The standard colour is white (RAL 9003), other RAL colours are available upon special order.

We reserve the rights to make modifications without notice.

Copyright © 2024 Teknoware. All rights reserved.

Date: May 05, 2024 | Source: www.teknoware.com/en/plus-emergency-exit-light-twsf192wa

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland
Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com



| | |
|-------------------------------------|---------------------------------|
| Product Code | TWSF192WA |
| Feature | Aalto Control, Escap, Lumi Test |
| Mounting (standard) | ceiling, surface |
| Mounting (optional) | wall |
| Customs Code | 94056180 |
| GTIN Code | 06438045029269 |
| ETIM Product Class | EC001957 |
| Length | 80 mm |
| Width | 673 mm |
| Height | 403 mm |
| Weight | 6.3 kg |
| Backup | 1 h |
| Max Input Power VA | 8,3 VA |
| Max Input Power W | 6,9 W |
| Nominal Supply Voltage | 220-240 V, 50/60 Hz AC |
| Protection Class | I |
| IP Class | IP55 |
| Temperature Range Min - Max | -25...+35 °C |
| Glow Wire Test of Plastic Materials | 850 °C |
| Viewing Distance | 60 m |
| Light Source | LED |
| Body Material | metal |
| Colour | RAL9003 |
| Electrical Installation | 3 x 2,5 mm ² |

ONE OR MORE OF THESE IS ALSO REQUIRED:

PICTOGRAMS FOR EMERGENCY EXIT



We reserve the rights to make modifications without notice.

Copyright © 2024 Teknoware. All rights reserved.

Date: May 05, 2024 | Source: www.teknoware.com/en/plus-emergency-exit-light-twsf192wa

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com



LIGHTS

| Product Code | Pictogram | Viewing Distance (m) | Compatible Product Groups |
|--------------|---|----------------------|---------------------------|
| PBVF1601E |  | 60 | Plus emergency exit light |
| PBVF1601E1 |  | 60 | Plus emergency exit light |
| PBVF1601E2 |  | 60 | Plus emergency exit light |
| PBVF1602E |  | 60 | Plus emergency exit light |
| PBVF1602E3 |  | 60 | Plus emergency exit light |
| PBVF1605E |  | 60 | Plus emergency exit light |
| PBVF1605E3 |  | 60 | Plus emergency exit light |

OPTIONAL ACCESSORIES:

OTHER ACCESSORIES FOR EMERGENCY EXIT LIGHTS



| Product Code | Product Name | Compatible Product Groups |
|--------------|---------------------------------------|---------------------------|
| TWTF101 | Plus wall mounting support TWTF101 | Plus emergency exit light |
| TWTF102 | Plus ceiling mounting support TWTF102 | Plus emergency exit light |
| TWTF103 | Plus wall bracket TWTF103 | Plus emergency exit light |

COMPATIBLE PRODUCTS:

OTHER ACCESSORIES FOR EMERGENCY EXIT LIGHTS



| Product Code | Product Name | Compatible Product Groups |
|--------------|---------------------------------------|---------------------------|
| TWTF103 | Plus wall bracket TWTF103 | Plus emergency exit light |
| TWTF102 | Plus ceiling mounting support TWTF102 | Plus emergency exit light |
| TWTF101 | Plus wall mounting support TWTF101 | Plus emergency exit light |

