

# TRISPOT LED EMERGENCY LIGHT TWT7651WK



## Addressable 230 V centrally supplied LED Emergency Exit Light

Trispot LED emergency light is compact and stylish. It has a machined and anodized aluminium body, which gives a special exemplary appearance.

Low areas and open spaces suit TWT76, whose optics are designed to provide a broad and uniform light pattern.

# INDIVIDUALLY PACKED LIGHTS


|              |
|--------------|
| Product Code |
| Y7651WK      |

|                                     |                             |
|-------------------------------------|-----------------------------|
| Product Code                        | TWT7651WK                   |
| Feature                             | Tapsa Control               |
| Mounting (standard)                 | recess                      |
| Customs Code                        | 94056080                    |
| GTIN Code                           | 6438045009827               |
| ETIM Product Class                  | EC001957                    |
| Length                              | 70 mm                       |
| Width                               | 70 mm                       |
| Height                              | 57 mm                       |
| Weight                              | 0,4 kg                      |
| Max Input Power VA                  | 15,3 VA                     |
| Max Input Power W                   | 9,5 W                       |
| Nominal Supply Voltage              | 220-240 V, 50/60 Hz AC, DC  |
| Protection Class                    | I                           |
| IP Class                            | IP20                        |
| Temperature Range Min - Max         | -30...+50 °C                |
| Glow Wire Test of Plastic Materials | 650 °C                      |
| Certifications                      | SGS Fimko                   |
| Light Source                        | LED                         |
| Body Material                       | machined anodized aluminium |
| Aperture for Recess Mounting        | ø60 mm                      |
| Electrical Installation             | 3 x 2,5 mm <sup>2</sup>     |

## Emergency lighting for escape routes (ceiling mounting)

Table of 1 lux for escape routes in the middle line according to the norm EN 1838.

Level of measurement 0,02 m, measurement result with battery operation.

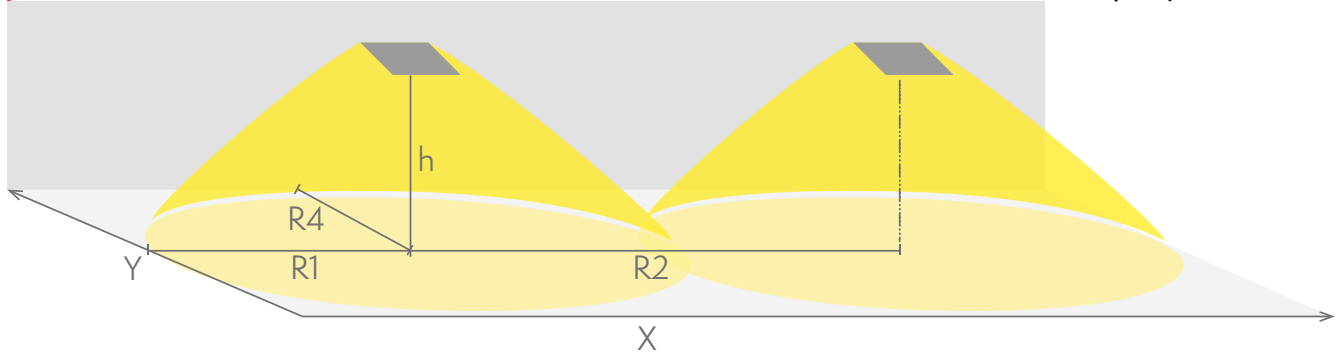

R1 distance from wall (X axis)

R2 installation distance between lights (X axis)

R4 distance from wall (Y axis)

TWT7651WK

| Mounting height (m) | Below the light lux | R1 (m) | R2 (m) | R4 (m) |
|---------------------|---------------------|--------|--------|--------|
|                     |                     | 1 lux  | 1 lux  | 1 lux  |
| 2,5                 | 25                  | 4,5    | 10     | 4,5    |
| 4                   | 10                  | 4,5    | 12     | 4,5    |
| 6                   | 4,5                 | 5      | 14     | 5      |
| 8                   | 2,5                 | 5      | 14     | 5      |

## Emergency lighting for open areas (ceiling mounting)

Table of 0,5 lux for open areas according to the norm EN 1838, 0,5 m edge district is considered in the table.

Level of measurement 0,02 m, measurement result with battery operation.



R1 distance from wall (X axis)

R2 installation distance between lights (X axis)

R3 installation distance between lights (Y axis)

R4 distance from wall (Y axis)

**TWT7651WK**

| Mounting height (m) | Below the light lux | R1 (m)  | R2 (m)  | R3 (m)  | R4 (m)  |
|---------------------|---------------------|---------|---------|---------|---------|
|                     |                     | 0,5 lux | 0,5 lux | 0,5 lux | 0,5 lux |
| 2,5                 | 25                  | 4       | 7       | 7       | 4       |
| 4                   | 10                  | 5       | 9       | 9       | 5       |
| 6                   | 4,5                 | 6       | 11      | 11      | 6       |
| 8                   | 2,5                 | 6       | 10      | 10      | 6       |

We reserve the rights to make modifications without notice.

Copyright © 2024 Teknoware. All rights reserved.


Date: April 28, 2024 | Source:

[www.teknoware.com/en/emergency-lighting/trispot-led-emergency-light-twt7651wk](http://www.teknoware.com/en/emergency-lighting/trispot-led-emergency-light-twt7651wk)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

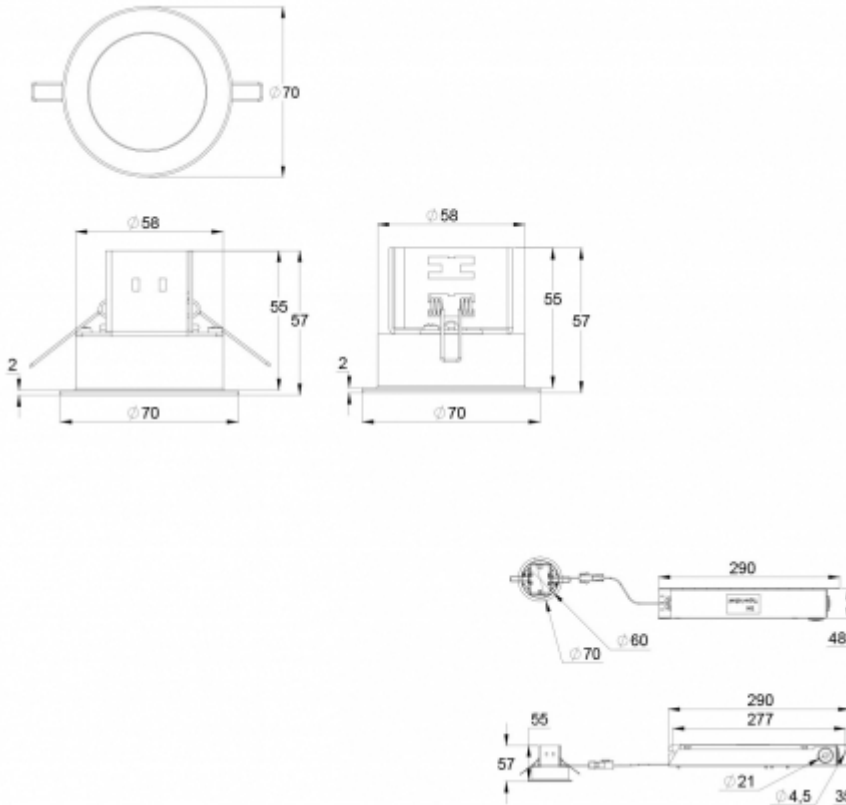

We reserve the rights to make modifications without notice.

Copyright © 2024 Teknoware. All rights reserved.

Date: April 28, 2024 | Source:

[www.teknoware.com/en/emergency-lighting/trispot-led-emergency-light-tw7651wk](http://www.teknoware.com/en/emergency-lighting/trispot-led-emergency-light-tw7651wk)

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

