



# ZONESPOT II MIDBAY EMERGENCY LIGHT

## TWT9351WKT



## Addressable 230 V centrally supplied LED emergency light

The Zonespot II Midbay is a surface-mounted emergency light. The luminaire's optics are designed to provide a broad, uniform light pattern that illuminates open areas effectively.

Thanks to the IP44 enclosure class, the Zonespot II is also suitable for damp areas. The luminaire is easy and quick to install thanks to a separate mounting base, which is also connected to the power supply.

We reserve the rights to make modifications without notice.  
Copyright © 2024 Teknoware. All rights reserved.  
Date: May 05, 2024 | Source:  
[www.teknoware.com/en/our-solutions/emergency-lighting-buildings/zonespot-ii-midbay-emergency-light-twt9351wkt](http://www.teknoware.com/en/our-solutions/emergency-lighting-buildings/zonespot-ii-midbay-emergency-light-twt9351wkt)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland  
Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

|                                     |                                       |
|-------------------------------------|---------------------------------------|
| Product Code                        | TWT9351WKT                            |
| Feature                             | Intelligent Controller, Tapsa Control |
| Mounting (standard)                 | surface                               |
| Mounting (optional)                 | pendel                                |
| Customs Code                        | 94056080                              |
| GTIN Code                           | 06438045029054                        |
| ETIM Product Class                  | EC001957                              |
| Length                              | 180 mm                                |
| Width                               | 180 mm                                |
| Height                              | 50 mm                                 |
| Weight                              | 0,5 kg                                |
| Max Input Power VA                  | 10 VA                                 |
| Max Input Power W                   | 5,5 W                                 |
| Nominal Supply Voltage              | 220-240 V, 50/60 Hz AC, DC            |
| Protection Class                    | II                                    |
| IP Class                            | IP44                                  |
| Temperature Range Min - Max         | -30...+50 °C                          |
| Glow Wire Test of Plastic Materials | 650 °C                                |
| Certifications                      | SGS Fimko                             |
| Light Source                        | LED                                   |
| Body Material                       | plastic                               |
| Colour                              | RAL9005                               |
| Electrical Installation             | 2/3 x 2,5 mm <sup>2</sup>             |
| Luminous Flux                       | 230 lm                                |

## Emergency lighting for escape routes (ceiling mounting)

Table of 1 lux for escape routes in the middle line according to the norm EN 1838.

Level of measurement 0,02 m, measurement result with battery operation.

We reserve the rights to make modifications without notice.

Copyright © 2024 Teknoware. All rights reserved.

Date: May 05, 2024 | Source:

[www.teknoware.com/en/our-solutions/emergency-lighting-buildings/zonespot-ii-midbay-emergency-light-twt9351wkt](http://www.teknoware.com/en/our-solutions/emergency-lighting-buildings/zonespot-ii-midbay-emergency-light-twt9351wkt)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)



R1 distance from wall (X axis)

R2 installation distance between lights (X axis)

R4 distance from wall (Y axis)


TWT9351WKT

| Mounting height (m) | Below the light lux | R1 (m) | R2 (m) | R4 (m) |
|---------------------|---------------------|--------|--------|--------|
|                     |                     | 1 lux  | 1 lux  | 1 lux  |
| 2,5                 | 25                  | 2,5    | 6      | 2,5    |
| 4                   | 9                   | 3      | 8      | 3      |
| 6                   | 4                   | 4      | 9      | 4      |
| 8                   | 2,5                 | 4,5    | 11     | 4,5    |
| 10                  | 1,5                 | 3,5    | 11     | 3,5    |

## Emergency lighting for open areas (ceiling mounting)

Table of 0,5 lux for open areas according to the norm EN 1838, 0,5 m edge district is considered in the table.

Level of measurement 0,02 m, measurement result with battery operation.

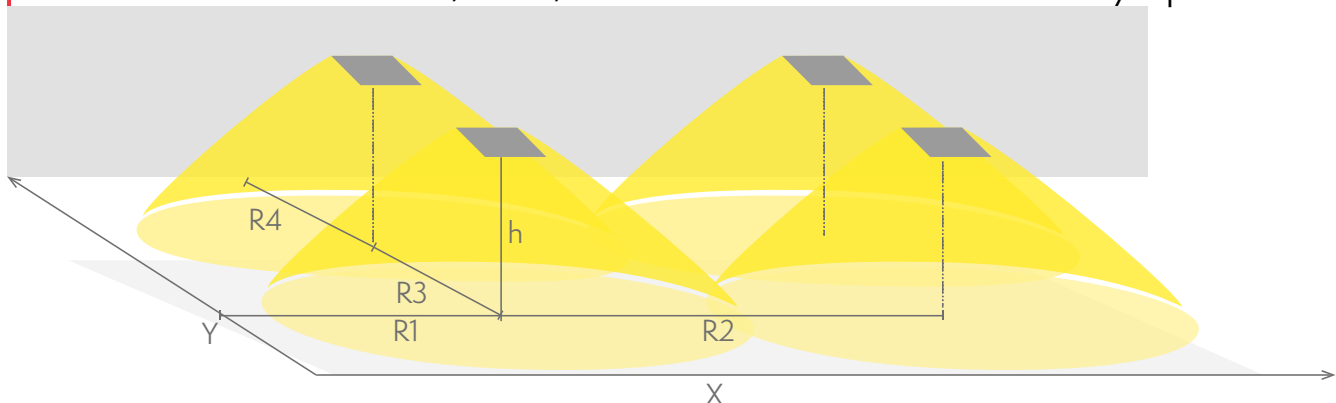

R1 distance from wall (X axis)

R2 installation distance between lights (X axis)

R3 installation distance between lights (Y axis)

R4 distance from wall (Y axis)

We reserve the rights to make modifications without notice.

Copyright © 2024 Teknoware. All rights reserved.

Date: May 05, 2024 | Source:

[www.teknoware.com/en/our-solutions/emergency-lighting-buildings/zonespot-ii-midbay-emergency-light-twt9351wkt](http://www.teknoware.com/en/our-solutions/emergency-lighting-buildings/zonespot-ii-midbay-emergency-light-twt9351wkt)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)

# TWT9351WKT

| Mounting height (m) | Below the light lux | R1 (m)  | R2 (m)  | R3 (m)  | R4 (m)  |
|---------------------|---------------------|---------|---------|---------|---------|
|                     |                     | 0,5 lux | 0,5 lux | 0,5 lux | 0,5 lux |
| 2,5                 | 25                  | 3       | 5,5     | 5,5     | 3       |
| 4                   | 9                   | 3,5     | 6,5     | 6,5     | 3,5     |
| 6                   | 4                   | 4,5     | 8       | 8       | 4,5     |
| 8                   | 2,5                 | 5       | 9,5     | 9,5     | 5       |
| 10                  | 1,5                 | 5       | 10      | 10      | 5       |

## OPTIONAL ACCESSORIES:

### SHOCK PROTECTING COVERS FOR EMERGENCY LIGHTS



| Product Code | Product Name                    | Compatible Product Groups                                  |
|--------------|---------------------------------|------------------------------------------------------------|
| TW77507B     | Shock protecting cover TW77507B | ESC 10 Emergency Exit Lights, ESC 80 Emergency Exit Lights |

### OPTIONAL MOUNTING ACCESSORIES FOR EMERGENCY LIGHTS

| Product Code | Product Name         | Compatible Product Groups                                                                                                                                                                                                                                                                                    |
|--------------|----------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| TWT9202      | Wall bracket TWT9202 | Linespot II: Lowbay, Surface-Mounted Emergency Lights, Zonespot II: Lowbay, Surface-Mounted Emergency Lights, Zonespot II: Midbay, Surface-Mounted Emergency Lights, Safe 29 Emergency Lights, Linespot II: Midbay, Surface-Mounted Emergency Lights, Zonespot II: Highbay, Surface-Mounted Emergency Lights |



We reserve the rights to make modifications without notice.

Copyright © 2024 Teknoware. All rights reserved.

Date: May 05, 2024 | Source:

[www.teknoware.com/en/our-solutions/emergency-lighting-buildings/zonespot-ii-midbay-emergency-light-twt9351wkt](http://www.teknoware.com/en/our-solutions/emergency-lighting-buildings/zonespot-ii-midbay-emergency-light-twt9351wkt)



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | [teknoware.com](http://teknoware.com) | [emexit@teknoware.com](mailto:emexit@teknoware.com)