#### SMOOTH LINE EMERGENCY LIGHT TWTC841WK

























### Addressable 24 V centrally supplied emergency light

Teknoware Smooth is a small and elegant yet extremely durable emergency light optimised for outdoor use. Because of the stylish design, the luminaire blends seamlessly into the architecture of the building. The Smooth always consists of two units: the luminaire and a separated indoor electronic unit. The Smooth includes a 5-metre fire-proof installation cable between the units. The luminaire is designed for surface mounting on a wall. The Smooth has an impact-resistant cast aluminium casing (IK10), and it is dust- and waterproof (IP65 for the visible part of the luminaire). The standard colour of the luminaire is graphite grey (RAL 7024), other colours are available on request (e.g. white RAL 9003).

The Smooth Line is a compact emergency light designed to illuminate escape routes efficiently. The luminaire provides a long and narrow pattern.




| Product Code                        | TWTC841WK               |
|-------------------------------------|-------------------------|
| Feature                             | Tapsa Control           |
| Mounting (standard)                 | recess                  |
| Customs Code                        | 94056080                |
| GTIN Code                           | 6438045026893           |
| ETIM Product Class                  | EC001957                |
| Length                              | 100 mm                  |
| Width                               | 60 mm                   |
| Height                              | 110 mm                  |
| Weight                              | 0.8 kg                  |
| Max Input Power VA                  | 3 VA                    |
| Max Input Power W                   | 3,0 W                   |
| Nominal Supply Voltage              | 24 V, 50/60 Hz AC, DC   |
| Protection Class                    | III                     |
| IP Class                            | IP65/IP20               |
| Temperature Range Min - Max         | -30+50 °C               |
| Glow Wire Test of Plastic Materials | 650 °C                  |
| Light Source                        | LED                     |
| Body Material                       | cast aluminium          |
| Colour                              | RAL7024                 |
| Electrical Installation             | 3 x 2,5 mm <sup>2</sup> |
| Luminous Flux                       | 114 lm                  |

# Emergency lighting for escape routes (ceiling mounting)

Table of 1 lux for escape routes in the middle line according to the norm EN 1838.

Level of measurement 0,02 m, measurement result with battery operation.



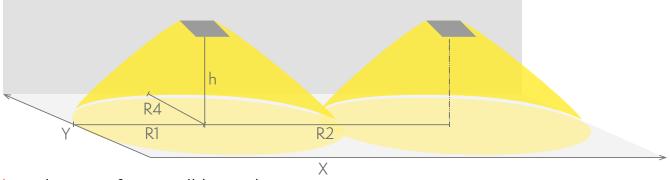

R1 distance from wall (X axis)
R2 installation distance between lights (X axis)
R4 distance from wall (Y axis)

#### TWTC841WK

| Mounting height (m) | Below the light lux | R1 (m) | R2 (m) | R4 (m) |
|---------------------|---------------------|--------|--------|--------|
|                     |                     | 1 lux  | 1 lux  | 1 lux  |
| 2,5                 | 4                   | 3.5    | 11     | 1      |
| 3                   | 2.9                 | 2.6    | 10     | 1      |
| 4                   | 1.5                 | 2      | 9      | 1      |

#### **OPTIONAL ACCESSORIES:**

## OPTIONAL MOUNTING ACCESSORIES FOR **EMERGENCY LIGHTS**

| Product Code | Product Name                            | Compatible Product Groups  |
|--------------|---|----------------------------|
| XWTA810      | Smooth surface mounting bracket XWTA810 | Smooth: Zone, Smooth: Line |



