
SOLID EXIT EMERGENCY EXIT LIGHT Y3092WAE140

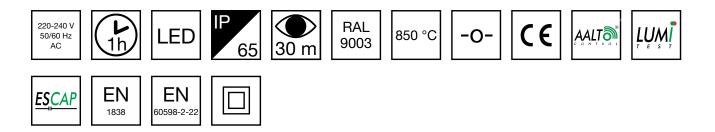

Self-contained emergency exit light with 1 h super capacitor, wireless central monitoring, and self-testing with a set of pictograms

Solid is Teknoware's IP65 class exit and emergency light product family. Solid is designed for demanding conditions. Wall mounted, one sided Solid exit light comes with easily changeable pictograms. Special attention has been paid to the design, for easy installation.

The luminaire is completely dust proof and water proof, so it is suitable for example for industrial premises and parking halls. Escap and centrally supplied luminaires are suitable also for outdoor use.

The range also has a model with a downlight function, which is suitable for example for mounting above a door.

We reserve the rights to make modifications without notice. Copyright © 2024 Teknoware. All rights reserved. Date: May 08, 2024 | Source: www.teknoware.com/en/solid-exit-emergency-exit-light-y3092wae140




| Product Code | Y3092WAE140 |
|-------------------------------------|---------------------------------|
| Feature | Aalto Control, Escap, Lumi Test |
| Mounting (standard) | wall, surface |
| Customs Code | 94056080 |
| GTIN Code | 6438045028033 |
| ETIM Product Class | EC001957 |
| Length | 371 mm |
| Width | 181 mm |
| Height | 57 mm |
| Weight | 1.35 kg |
| Backup | 1h |
| Max Input Power VA | 4 VA |
| Nominal Supply Voltage | 220-240 V, 50/60 Hz AC |
| Protection Class | II |
| IP Class | IP65 |
| Temperature Range Min - Max | -25+35 °C |
| Glow Wire Test of Plastic Materials | 850 °C |
| Viewing Distance | 30 m |
| Light Source | LED |
| Body Material | plastic |
| Colour | RAL9003 |
| Electrical Installation | 2/3 x 2,5 mm ² |
| Luminous Flux | 24 lm |

Downlight chart for Exit Lights

Tables of 1 lux and 0,5 lux, under the Exit Light. Level of measurement 0,02 m, measurement result with battery operation.

We reserve the rights to make modifications without notice. Copyright © 2024 Teknoware. All rights reserved. Date: May 08, 2024 | Source: www.teknoware.com/en/solid-exit-emergency-exit-light-y3092wae140





R1 distance from wall (X axis) R4 distance from wall (Y axis) Y3092WAE140

| Mounting height (m) | Below the light lux | R1 (m) | R4 (m) | R1 (m) | R4 (m) |
|---------------------|---------------------|--------|--------|---------|---------|
| | | 1 lux | 1 lux | 0,5 lux | 0,5 lux |
| 2 | 16 | 1 | 1 | 1.3 | 1.3 |
| 2,5 | 11 | 1.5 | 1.3 | 1.4 | 1.5 |
| 3 | 7 | 1.6 | 1.4 | 1.6 | 1.7 |
| 4 | 3 | 1.4 | 1.5 | 1.8 | 1.9 |
| 5 | 2 | 1.5 | 1.5 | 2 | 2 |

OPTIONAL ACCESSORIES:

OPTIONAL MOUNTING ACCESSORIES FOR EMERGENCY EXIT LIGHTS



| | Product Code | Product Name | Compatible Product Groups |
|--|--------------|---|--|
| | TWT3001 | Solid Recess Mounting Frame TWT3001 | Solid Exit Emergency Exit Lights, Solid Exit 2 Emergency Exit Lights, Solid: Line Lowbay Emergency Lights, Solid: Line Midbay Emergency Lights, Solid: Zone Lowbay Emergency LIghts, Solid: Zone Midbay Emergency Lights |
| | TWT3002 | Solid Wall bracket TWT3002 | Solid Exit Emergency Exit Lights, Solid Exit 2 Emergency Exit Lights, Solid: Line Lowbay Emergency Lights, Solid: Line Midbay Emergency Lights, Solid: Zone Lowbay Emergency LIghts, Solid: Zone Midbay Emergency Lights |
| | TWT3003 | Solid Flag bracket TWT3003 | Solid Exit Emergency Exit Lights, Solid Exit 2 Emergency Exit Lights, Solid: Line Lowbay Emergency Lights, Solid: Line Midbay Emergency Lights, Solid: Zone Lowbay Emergency LIghts, Solid: Zone Midbay Emergency Lights |
| | TWT3004 | Solid Ceiling bracket TWT3004 | Solid Exit Emergency Exit Lights, Solid Exit 2 Emergency Exit Lights, Solid: Line Lowbay Emergency Lights, Solid: Line Midbay Emergency Lights, Solid: Zone Lowbay Emergency Lights, Solid: Zone Midbay Emergency Lights |

We reserve the rights to make modifications without notice. Copyright © 2024 Teknoware. All rights reserved. Date: May 08, 2024 | Source: www.teknoware.com/en/solid-exit-emergency-exit-light-y3092wae140



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com