
# ESC 81 LED EMERGENCY EXIT LIGHT Y8192WM165





Self-contained ESCAP Emergency Exit Light with 1 h Super Capacitor and Lumi Test Self-testing with 2-sided pictogram, arrow down, 60 m viewing distance (Invidually packed TWS8192WM)

ESC 81 is an innovative LED exit light equipped with a light plate. It combines cutting edge technology with modern luminaire design.

Evenly illuminated light plates, low power consumption and slender looking luminaires are the result of Teknoware's pioneering, expertise in electronics and product design. Luminaire can be used as 1 or 2 sided, recess and surface mounted.

ESC 81 is particularly easy and fast to install thanks to a separate mounting piece, into which also the power supply is connected.

We reserve the rights to make modifications without notice. Copyright © 2024 Teknoware. All rights reserved. Date: April 28, 2024 | Source: www.teknoware.com/en/emergency-lighting/esc-81-led-emergency-exit-light-y8192wm165

ΕN

1838

ΕN

0598-2-2



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland Tel +358 3 883 020 | VAT-number F101494751 | teknoware.com | emexit@teknoware.com

| Product Code                        | Y8192WM165                |
|-------------------------------------|---------------------------|
| Feature                             | Escap, Lumi Test          |
| Mounting (standard)                 | ceiling, wall             |
| Mounting (optional)                 | recess, flag, pendel      |
| Customs Code                        | 94056080                  |
| GTIN Code                           | 6438045016443             |
| ETIM Product Class                  | EC001957                  |
| Length                              | 410 mm                    |
| Width                               | 390 mm                    |
| Height                              | 46 mm                     |
| Weight                              | 1,4 kg                    |
| Backup                              | 1h                        |
| Max Input Power VA                  | 4 VA                      |
| Nominal Supply Voltage              | 220-240 V, 50/60 Hz AC    |
| Protection Class                    | II                        |
| IP Class                            | IP44                      |
| Temperature Range Min - Max         | -25+35 °C                 |
| Glow Wire Test of Plastic Materials | 650 °C                    |
| Viewing Distance                    | 60 m                      |
| Light Source                        | LED                       |
| Body Material                       | plastic                   |
| Aperture for Recess Mounting        | 53 x 415 mm               |
| Colour                              | RAL9003                   |
| Electrical Installation             | 2/3 x 2,5 mm <sup>2</sup> |

### OPTIONAL ACCESSORIES:

# SHOCK PROTECTING COVERS FOR

We reserve the rights to make modifications without notice. Copyright © 2024 Teknoware. All rights reserved. Date: April 28, 2024 | Source: www.teknoware.com/en/emergency-lighting/esc-81-led-emergency-exit-light-y8192wm165



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com

## EMERGENCY LIGHTS



### COVER LABELS FOR EMERGENCY EXIT LIGHTS

| Product Code | Pictogram | Compatible Product Groups    |
|--------------|-----------|------------------------------|
| XWT8106      |           | ESC 81 Emergency Exit Lights |


#### OPTIONAL MOUNTING ACCESSORIES FOR EMERGENCY EXIT LIGHTS



| Product Code | Product Name                   | Compatible Product Groups                                                                |
|--------------|--------------------------------|------------------------------------------------------------------------------------------|
| TWT9000      | Suspension bracket TWT9000     | ESC 90 Emergency Exit Lights, ESC 80 Emergency Exit Lights, ESC 81 Emergency Exit Lights |
| TWT8101B     | Recess mounting frame TWT8101B | ESC 81 Emergency Exit Lights                                                             |
| TWT8102      | Flag bracket TWT8102           | ESC 81 Emergency Exit Lights                                                             |

We reserve the rights to make modifications without notice. Copyright © 2024 Teknoware. All rights reserved. Date: April 28, 2024 | Source: www.teknoware.com/en/emergency-lighting/esc-81-led-emergency-exit-light-y8192wm165



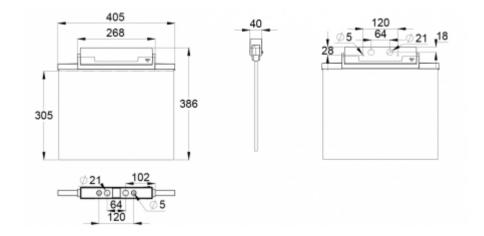

We reserve the rights to make modifications without notice. Copyright © 2024 Teknoware. All rights reserved. Date: April 28, 2024 | Source: www.teknoware.com/en/emergency-lighting/esc-81-led-emergency-exit-light-y8192wm165



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com