
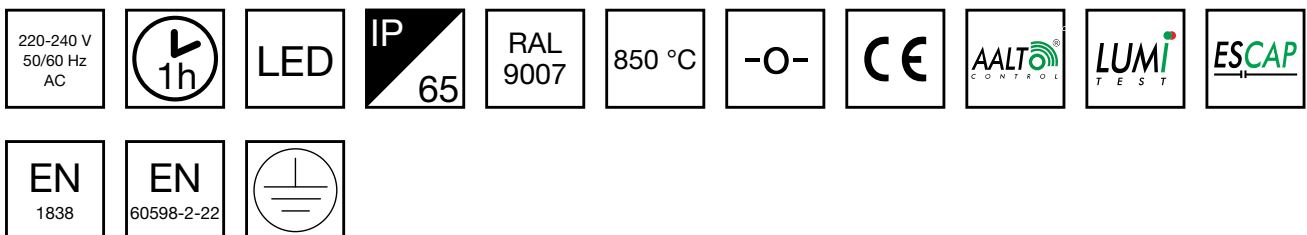


STAMINA ZONE EMERGENCY LIGHT TWS5792WAG

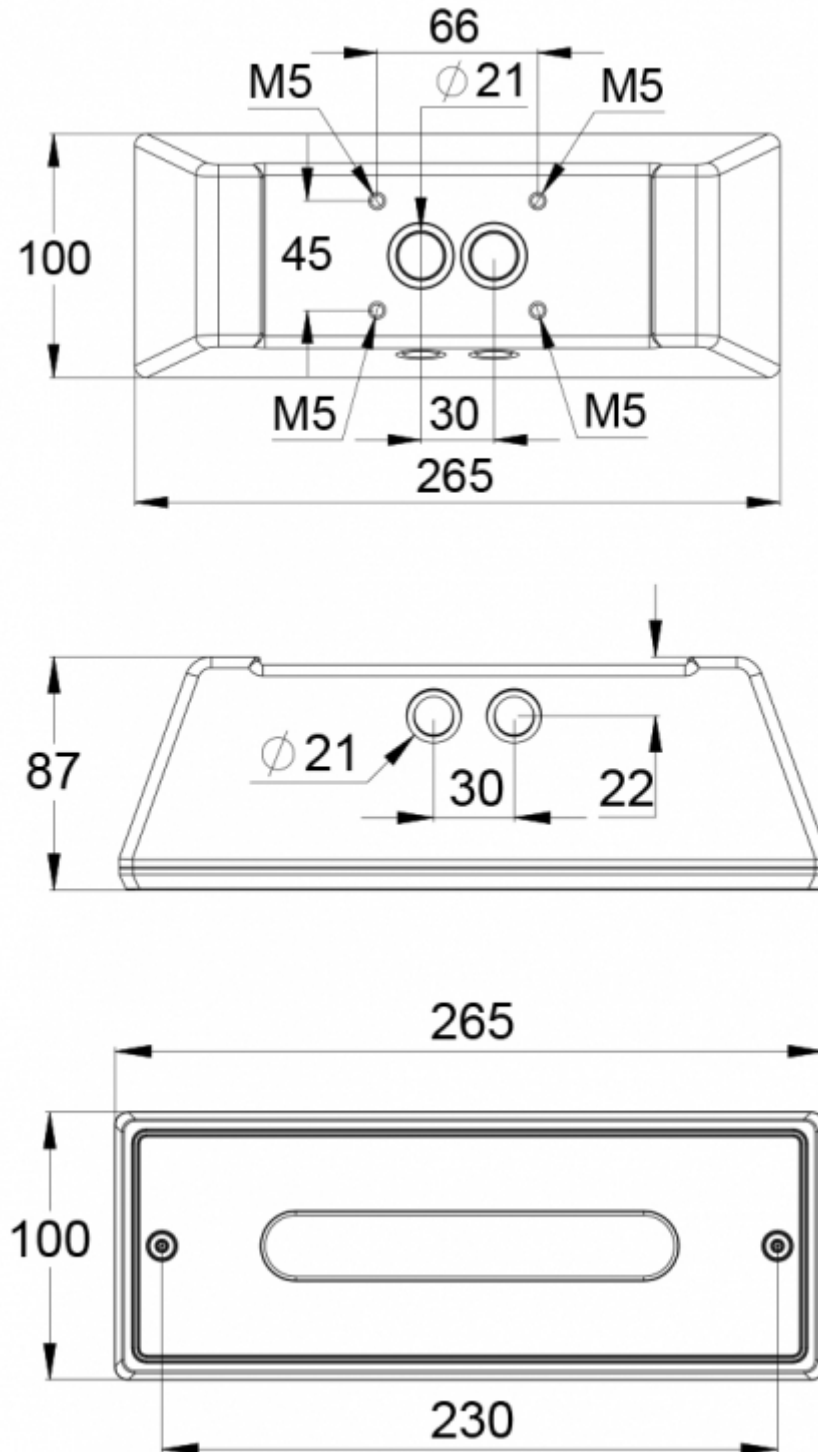

We reserve the rights to make modifications without notice.

Copyright © 2024 Teknoware. All rights reserved.

Date: May 06, 2024 | Source:

www.teknoware.com/en/emergency-lighting/stamina-zone-emergency-light-tws5792wag



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com

Self-contained Escap emergency light with 1h super capacitor and wireless central monitoring

Stamina is designed to meet demanding needs in challenging environments.

Stamina Zone TWS5792WAG has a dustproof and waterproof (IP65) impact-resistant aluminium casing (IK10). The luminaire has a glass dome, which provides excellent protection against chemicals. The Escap supercapacitor enables the luminaire to function even in freezing temperatures down to -25°C (13°F). The Stamina can be used for general lighting when connected to the mains. The luminaire has several mounting options. This model is equipped with wireless Aalto monitoring and Lumi Test self-testing.

We reserve the rights to make modifications without notice.

Copyright © 2024 Teknoware. All rights reserved.

Date: May 06, 2024 | Source:

www.teknoware.com/en/emergency-lighting/stamina-zone-emergency-light-tws5792wag

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com



Product Code	TWS5792WAG
Feature	Aalto Control, Escap, Lumi Test
Mounting (standard)	wall, ceiling
Customs Code	94056080
GTIN Code	6438045026367
ETIM Product Class	EC001957
Length	265 mm
Width	100 mm
Height	87 mm
Weight	1.4 kg
Backup	1 h
Max Input Power VA	11 VA / 3 VA
Max Input Power W	7 W
Nominal Supply Voltage	220-240 V, 50/60 Hz AC
Protection Class	I
IP Class	IP65
Temperature Range Min - Max	-25...+35 °C
Glow Wire Test of Plastic Materials	850 °C
Light Source	LED
Body Material	cast aluminium
Colour	RAL9007
Electrical Installation	3/4 x 2,5 mm ²
Luminous Flux	96 lm

Emergency lighting for open areas (ceiling mounting)

Table of 0,5 lux for open areas according to the norm EN 1838, 0,5 m edge district is considered in the table.

Level of measurement 0,02 m, measurement result with battery operation.

We reserve the rights to make modifications without notice.

Copyright © 2024 Teknoware. All rights reserved.


Date: May 06, 2024 | Source:

www.teknoware.com/en/emergency-lighting/stamina-zone-emergency-light-tws5792wag

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com



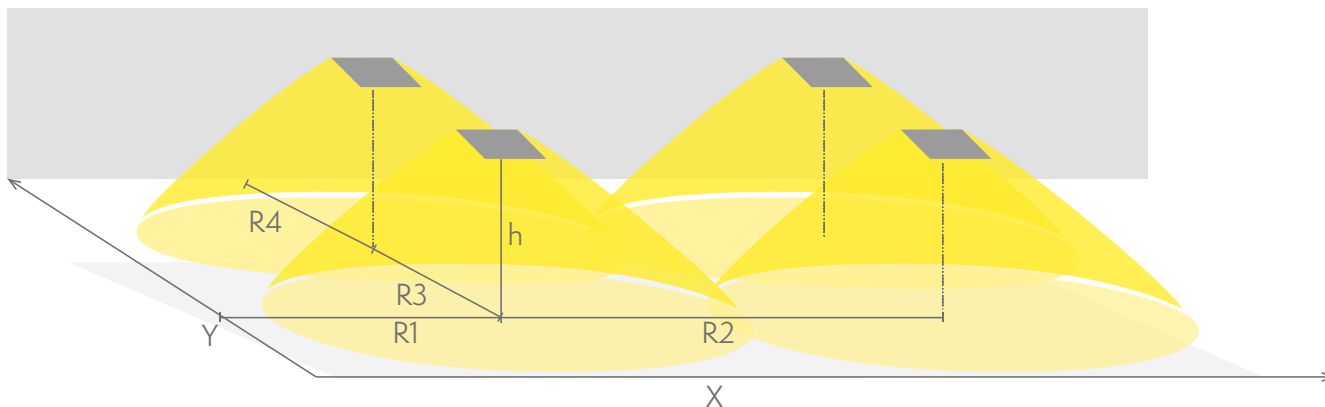

R1 distance from wall (X axis)

R2 installation distance between lights (X axis)

R3 installation distance between lights (Y axis)

R4 distance from wall (Y axis)

TWS5792WAG

Mounting height (m)	Below the light lux	R1 (m)	R2 (m)	R3 (m)	R4 (m)
		0,5 lux	0,5 lux	0,5 lux	0,5 lux
2,5	6.5	3.5	7.5	3.5	2
3	4.5	4	8	5	2.5
4	2.5	4.5	9	6	3
6	1	4.5	9	6	3

ONE OR MORE OF THESE IS ALSO REQUIRED:

OPTIONAL MOUNTING ACCESSORIES FOR EMERGENCY LIGHTS

Product Code	Product Name	Compatible Product Groups
XWT5210	Stamina wall bracket XWT5210	Stamina: Zone, Stamina: Zone Highoutput, Stamina: Line Lowbay, Stamina: Line Midbay
XWT5211	Stamina ceiling bracket XWT5211	Stamina: Zone, Stamina: Zone Highoutput, Stamina: Line Lowbay, Easy: Combo Emergency / Exit Light

OPTIONAL ACCESSORIES:

OPTIONAL MOUNTING ACCESSORIES FOR

We reserve the rights to make modifications without notice.

Copyright © 2024 Teknoware. All rights reserved.

Date: May 06, 2024 | Source:

www.teknoware.com/en/emergency-lighting/stamina-zone-emergency-light-tws5792wag

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com



EMERGENCY LIGHTS

Product Code	Product Name	Compatible Product Groups
XWT5213	Stamina recess mounting frame XWT5213	Stamina: Zone, Stamina: Zone Highoutput, Stamina: Line Lowbay, Stamina: Line Midbay

We reserve the rights to make modifications without notice.

Copyright © 2024 Teknoware. All rights reserved.

Date: May 06, 2024 | Source:

www.teknoware.com/en/emergency-lighting/stamina-zone-emergency-light-tws5792wag

Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland

Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com

