
# ESC 81 LED EMERGENCY EXIT LIGHT Y8192WM163





Self-contained ESCAP Emergency Exit Light with 1 h Super Capacitor and Lumi Test Self-testing with 2-sided pictogram, arrow left/right, 60 m viewing distance (Invidually packed TWS8192WM)

ESC 81 is an innovative LED exit light equipped with a light plate. It combines cutting edge technology with modern luminaire design.

Evenly illuminated light plates, low power consumption and slender looking luminaires are the result of Teknoware's pioneering, expertise in electronics and product design. Luminaire can be used as 1 or 2 sided, recess and surface mounted.

ESC 81 is particularly easy and fast to install thanks to a separate mounting piece, into which also the power supply is connected.

We reserve the rights to make modifications without notice. Copyright © 2024 Teknoware. All rights reserved. Date: April 27, 2024 | Source: www.teknoware.com/en/emergency-lighting/esc-81-led-emergency-exit-light-y8192wm163

ΕN

1838

ΕN

0598-2-2



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland Tel +358 3 883 020 | VAT-number F101494751 | teknoware.com | emexit@teknoware.com

Product Code	Y8192WM163
Feature	Escap, Lumi Test
Mounting (standard)	ceiling, wall
Mounting (optional)	recess, flag, pendel
Customs Code	94056080
GTIN Code	6438045016368
ETIM Product Class	EC001957
Length	410 mm
Width	390 mm
Height	46 mm
Weight	1,4 kg
Backup	1h
Max Input Power VA	4 VA
Nominal Supply Voltage	220-240 V, 50/60 Hz AC
Protection Class	II
IP Class	IP44
Temperature Range Min - Max	-25+35 °C
Glow Wire Test of Plastic Materials	650 °C
Viewing Distance	60 m
Light Source	LED
Body Material	plastic
Aperture for Recess Mounting	53 x 415 mm
Colour	RAL9003
Electrical Installation	2/3 x 2,5 mm <sup>2</sup>

### OPTIONAL ACCESSORIES:

# SHOCK PROTECTING COVERS FOR

We reserve the rights to make modifications without notice. Copyright © 2024 Teknoware. All rights reserved. Date: April 27, 2024 | Source: www.teknoware.com/en/emergency-lighting/esc-81-led-emergency-exit-light-y8192wm163



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com

# EMERGENCY LIGHTS



### COVER LABELS FOR EMERGENCY EXIT LIGHTS

Product Code	Pictogram	Compatible Product Groups
XWT8106		ESC 81 Emergency Exit Lights

#### OPTIONAL MOUNTING ACCESSORIES FOR EMERGENCY EXIT LIGHTS




Product Code	Product Name	Compatible Product Groups
TWT9000	Suspension bracket TWT9000	ESC 90 Emergency Exit Lights, ESC 80 Emergency Exit Lights, ESC 81 Emergency Exit Lights
TWT8101B	Recess mounting frame TWT8101B	ESC 81 Emergency Exit Lights
TWT8102	Flag bracket TWT8102	ESC 81 Emergency Exit Lights

We reserve the rights to make modifications without notice. Copyright © 2024 Teknoware. All rights reserved. Date: April 27, 2024 | Source: www.teknoware.com/en/emergency-lighting/esc-81-led-emergency-exit-light-y8192wm163



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com

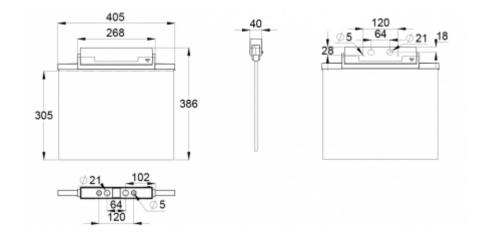

We reserve the rights to make modifications without notice. Copyright © 2024 Teknoware. All rights reserved. Date: April 27, 2024 | Source: www.teknoware.com/en/emergency-lighting/esc-81-led-emergency-exit-light-y8192wm163



Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com