
LINESPOT II LOWBAY EMERGENCY LIGHT TWT9953WA





Self-contained LED Emergency Light with 3 h Battery and Wireless Central Monitoring

The Linespot II Lowbay is a surface-mounted emergency light that is particularly suitable for low spaces. The luminaire's optics are designed to provide a long and narrow light pattern that illuminates corridors and escape routes efficiently.

Thanks to the IP44 enclosure class, the Linespot II is also suitable for damp areas. The luminaire is easy and fast to install, thanks to a separate mounting base, which is also connected to the power supply.

We reserve the rights to make modifications without notice. Copyright © 2024 Teknoware. All rights reserved. Date: May 16, 2024 | Source:

www.teknoware.com/en/emergency-lighting-1/linespot-ii-lowbay-emergency-light-twt9953w



INDIVIDUALLY PACKED LIGHTS

Iroduct Code	
9953WA	
3171W143	
3171W148	
3171W147	
3171W145	
3171W149	
3171W141	
3171W142	

Product Code	TWT9953WA
Feature	Aalto Control, Lumi Test
Mounting (standard)	surface
Mounting (optional)	pendel
Customs Code	94056080
GTIN Code	6438045019642
ETIM Product Class	EC001957
Length	180 mm
Width	180 mm
Height	50 mm
Weight	0,9 kg
Backup	3 h
Max Input Power VA	6 VA
Nominal Supply Voltage	220-240 V, 50/60 Hz AC
Protection Class	11
IP Class	IP44
Temperature Range Min - Max	0+35 °C

We reserve the rights to make modifications without notice. Copyright © 2024 Teknoware. All rights reserved. Date: May 16, 2024 | Source: www.teknoware.com/en/emergency-lighting-1/linespot-ii-lowbay-emergency-light-twt9953w a




Teknoware Oy | P.O. Box 19, 15101 Lahti | Ilmarisentie 8, 15200 Lahti Finland Tel +358 3 883 020 | VAT-number FI01494751 | teknoware.com | emexit@teknoware.com

Glow Wire Test of Plastic Materials	850 °C
Light Source	LED
Body Material	plastic
Colour	RAL9003
Electrical Installation	2/3 x 2,5 mm²
Luminous Flux	230 lm

Emergency lighting for escape routes (ceiling mounting)

Table of 1 lux for escape routes in the middle line according to the norm EN 1838.

Level of measurement 0,02 m, measurement result with battery operation.

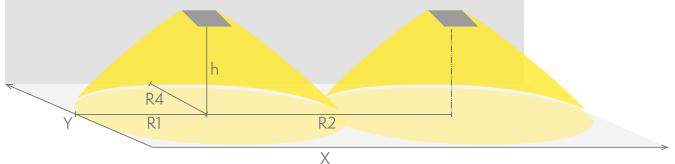

R1 distance from wall (X axis) R2 installation distance between lights (X axis) R4 distance from wall (Y axis) TWT9953WA

Mounting height (m) Below the light lux R1 (m) R2 (m) R4 (m) 1 lux 1 lux 1 lux 2.5 7.5 9 21 1 3 28 4 10 1 6 1,5 9 22 1

OPTIONAL ACCESSORIES:

SHOCK PROTECTING COVERS FOR

We reserve the rights to make modifications without notice. Copyright © 2024 Teknoware. All rights reserved.

Date: May 16, 2024 | Source:

www.teknoware.com/en/emergency-lighting-1/linespot-ii-lowbay-emergency-light-twt9953w a



-12

EMERGENCY LIGHTS

Product Code	Product Name	Compatible Product Groups
TW77507B	Shock protecting cover TW77507B	ESC 10 Emergency Exit Lights, ESC 80 Emergency Exit Lights

OPTIONAL MOUNTING ACCESSORIES FOR **EMERGENCY LIGHTS**

Product Code	Product Name	Compatible Product Groups
TWT9202	Wall bracket TWT9202	Linespot II: Lowbay, Surface-Mounted Emergency Lights, Zonespot II: Lowbay, Surface-Mounted Emergency Lights, Zonespot II: Midbay, Surface-Mounted Emergency Lights, Safe 29 Emergency Lights, Linespot II: Midbay, Surface- Mounted Emergency Lights, Zonespot II: Highbay, Surface-Mounted Emergency Lights
TW77504F	Suspension bracket TW77504F	Linespot II: Lowbay, Surface-Mounted Emergency Lights, Zonespot II: Lowbay, Surface-Mounted Emergency Lights, Zonespot II: Midbay, Surface-Mounted Emergency Lights, Linespot II: Midbay, Surface-Mounted Emergency Lights, Zonespot II: Highbay, Surface-Mounted Emergency Lights

We reserve the rights to make modifications without notice. Copyright © 2024 Teknoware. All rights reserved. Date: May 16, 2024 | Source: www.teknoware.com/en/emergency-lighting-1/linespot-ii-lowbay-emergency-light-twt9953w

9





68 43

(**@**)

O

ī

Ø21

We reserve the rights to make modifications without notice. Copyright © 2024 Teknoware. All rights reserved. Date: May 16, 2024 | Source: www.teknoware.com/en/emergency-lighting-1/linespot-ii-lowbay-emergency-light-twt9953w a

